


AMAN

SPRINGLESS HOPPER SWING WEIGH BATCHER

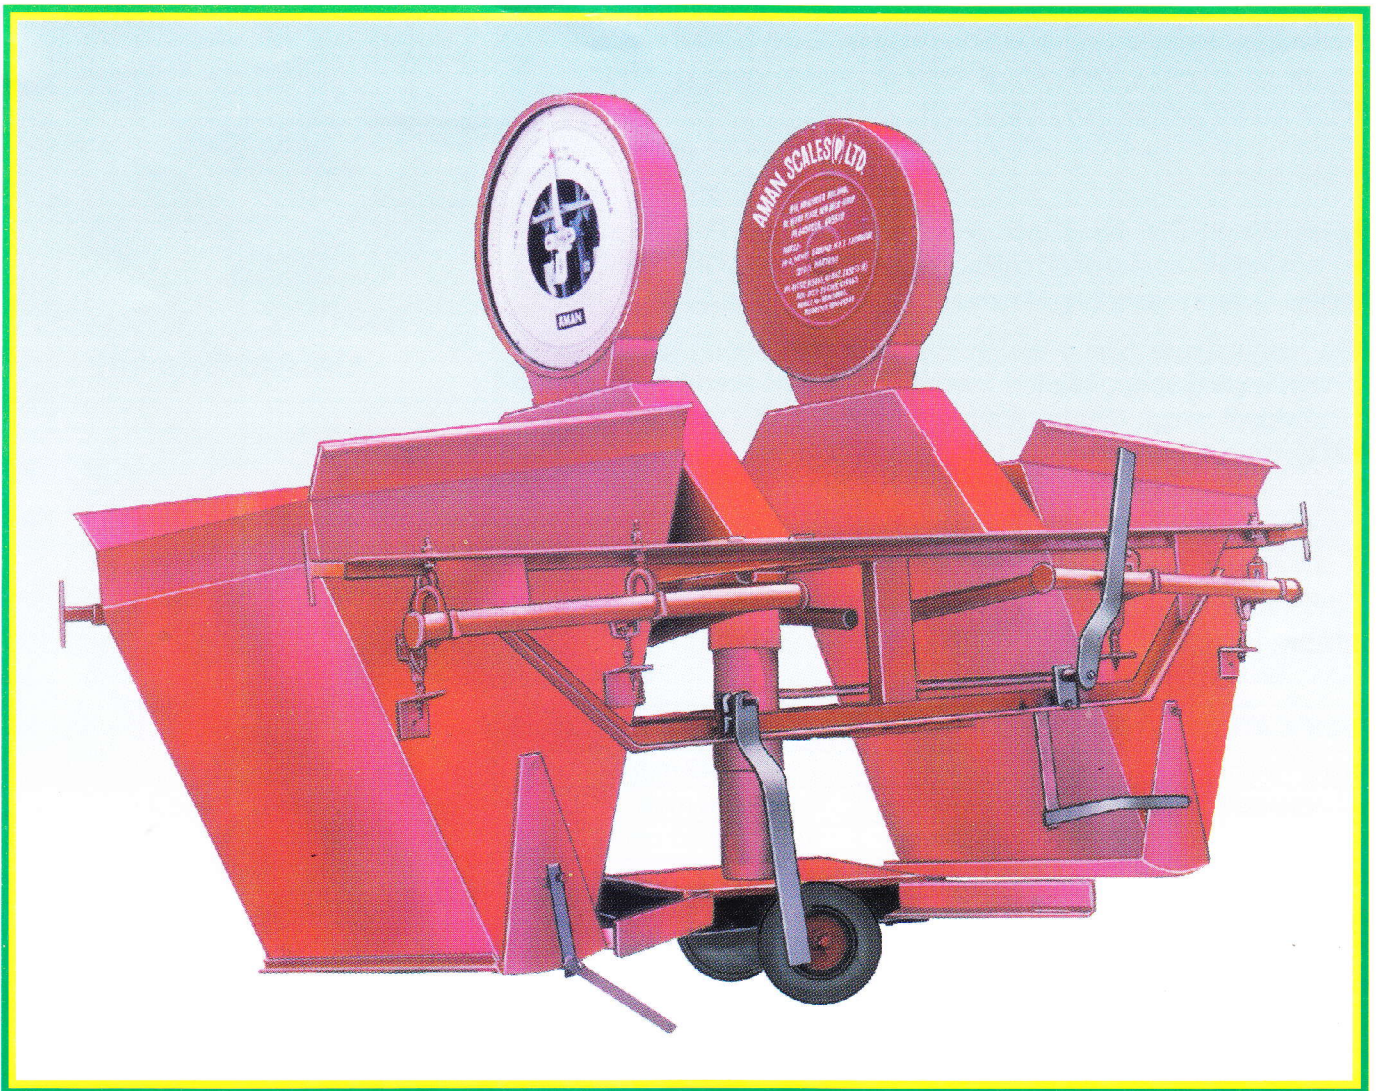

AMAN SCALES (P) LIMITED

AMAN

SPRINGLESS HOPPER SWING WEIGH BATCHER

Aman Swing Weigh Batcher has an accuracy of $\pm 1\%$ when kept in good order, under smooth conditions we guarantee $\pm 3\%$

WEIGH BUCKET

Aman Hopper Loaded swing Weigh Batchers are made with either single bucket or double bucket. It has 4 point suspension, hardened steel knife edge each having 4 wearing edges, Each bucket has a capacity of 14-15 cu. ft. (400 lit). Bottom discharge gate is 2' 11" (88mm) wide and operated by single lever.


WEIGH DIALS

Springless Weigh Dial head incorporating "Cam and Pendulum" mechanism Individual dial head calibrated upto either 1000kg or 650 kg Smallest division being 2 kg Minimum weight to register 50 Kg.


We also manufacture Swing Weigh Batchers with spring loaded mechanism having spring loaded mechanical shock absorbers, in which individual weigh dial is calibrated from 0 to 650 kg. being smallest division. Minimum weight to register 50 kg.

SWINGING CARRIAGE

It is fitted with two 12" x 3" solid tyred wheels & four adjustable jack feet.

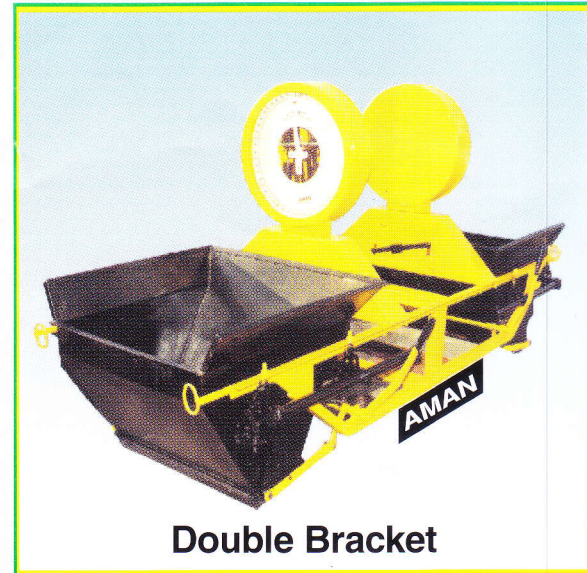

Double Bracket

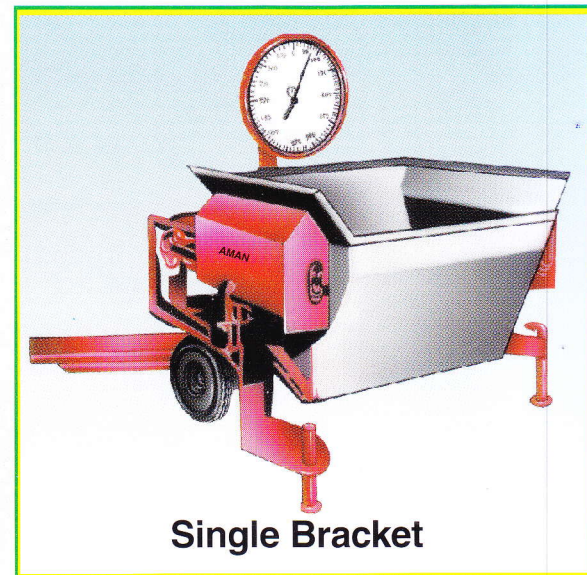

Single Bracket

SPECIFICATION	SINGLE BUCKET	DOUBLE BUCKET
Loading height	3' - 5" (1040 mm)	3' - 5" (1040 mm)
Discharge height	1' - 5" (430 mm)	1' - 5" (430 mm)
Overall length	6' - 4½" (1935 mm)	10' - 0" (3050 mm)
Overall width	5' - 6" (1680 mm)	5' - 6" (1680 mm)
Overall height	5' - 10" (1780 mm)	5' - 10" (1780 mm)
Net weight	615 Kg. Each	875 Kg. Each
Gross weight	766 Kg. Each	1055 Kg Each

AMAN SCALES (P) LIMITED

Head Office

14-A, Nehru Ground, (Near Main Post Office) N.I.T. Faridabad (Haryana)
 PH. : 91-415312, 415463, 411862, 423753 (OFF), 91-283255, 284743 (RESI.)
 Fax : 0129-284743, 415463. E-mail : aman scle@ndf.vsnl.net.in
 Dialing Code : From Delhi -91, STD - 0129 : ISD - 91-129
MOBILE NO. 9811030885, 9811049340, 9811045903, 9811113907

Branch Office

B-10, Mansarover Building,
 90, Nehru Place,
 New Delhi - 110019.
 Ph. : 6430208, 6435119, 6404166
 Fax : 6404166